


Proceeding Paper

Optimization and Energy Efficiency in the Separation of Butadiene 1,3 from Pyrolysis Products: A Model-Based Approach [†]

Muhriddin Ibodullayev ^{1,*}, Jonibek Norqulov ¹, Abdulaziz Baxtiyorov ¹, Adham Norkobilov ¹ 
and Orifjon Kodirov ²

¹ Shahrissabz Faculty of Food Engineering, Karshi State Technical University, 20, Shahrissabz Street, Shahrissabz 181306, Uzbekistan; jbnorkulov@gmail.com (J.N.); abdubakh04@gmail.com (A.B.); adham.norkobilov@gmail.com (A.N.)

² Faculty of General and Inorganic Chemistry, National University of Uzbekistan, 4, University Street, Tashkent 100174, Uzbekistan; adhambeknt@mail.ru

* Correspondence: muhribo.info@gmail.com; Tel.: +998-993015567

[†] Presented at the 5th International Electronic Conference on Applied Sciences, 4–6 December 2024; Available online: <https://ecp2024.sciforum.net/>.

Abstract

The separation of butadiene 1,3 from pyrolysis products is a critical step in the petrochemical industry, as butadiene is a key raw material for producing synthetic rubber and other polymers. This study presents a detailed model-based analysis of the separation process, focusing on optimizing operational parameters to maximize butadiene recovery, enhance product purity, and reduce energy consumption. The simulation was conducted using Aspen Plus, evaluating critical variables such as the solvent-to-feed ratio, reflux ratio, number of column stages, and energy integration between distillation units. The simulation results indicated that an optimal solvent-to-feed ratio of 1.5:1 and a reflux ratio of 4.2:1 in the extractive distillation column provided the highest separation efficiency. Under these conditions, the recovery rate of butadiene 1,3 reached 98%, with a final product purity of 99.5%. Furthermore, this study revealed that increasing the number of theoretical stages in the distillation column improved the separation process without significantly increasing energy demand. Energy integration, specifically through heat recovery between the primary distillation and extractive distillation columns, led to a 12% reduction in total energy consumption. These findings demonstrate the importance of fine-tuning operational parameters to achieve high separation efficiency and product quality while minimizing energy use. This model-based analysis provides valuable insights into the design and optimization of industrial-scale butadiene separation processes, offering strategies to reduce operational costs and improve sustainability in production. The methodology and results can serve as a basis for further improvements in similar separation processes across the petrochemical industry.

Keywords: butadiene 1,3; pyrolysis products; separation process; distillation; modeling; Aspen Plus



check for
updates

Academic Editor: Francesco Arcadio

Published: 28 August 2025

Citation: Ibodullayev, M.; Norqulov, J.; Baxtiyorov, A.; Norkobilov, A.; Kodirov, O. Optimization and Energy Efficiency in the Separation of Butadiene 1,3 from Pyrolysis Products: A Model-Based Approach. *Eng. Proc.* **2025**, *87*, 103. <https://doi.org/engproc2025087103>

Copyright: © 2025 by the authors.

Licensee MDPI, Basel, Switzerland.

This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Butadiene 1,3 is an essential feedstock in the petrochemical industry, primarily utilized in the synthesis of synthetic rubber, latex, and various polymeric materials [1]. It is predominantly obtained from the cracking of hydrocarbons in naphtha or gas oil-based

steam-cracking units [2]. The separation of butadiene from pyrolysis products is challenging due to its close boiling point with other C4 hydrocarbons such as butenes and butanes [3]. Extractive distillation, often employing selective solvents like N-methyl-2-pyrrolidone (NMP) or acetonitrile, is widely used to achieve the desired purity and recovery rates [4].

These advancements provide valuable context for further improving butadiene separation efficiency and sustainability beyond conventional extractive distillation approaches.

Process optimization is crucial for minimizing energy consumption while ensuring high product quality. Advanced modeling and simulation tools, such as Aspen Plus, have proven effective in optimizing separation processes by allowing precise evaluation of operational parameters [5]. A study has explored the impact of variables such as solvent-to-feed ratio, reflux ratio, and column configurations on butadiene separation [6]. By integrating simulation with experimental validation, efficiency improvements of more than 20% in energy savings have been reported [7].

In recent years, significant research efforts have been dedicated to exploring alternative solvents and advanced separation methods to enhance butadiene recovery. Novel solvents such as ionic liquids and deep eutectic solvents have been investigated for their high selectivity and reduced environmental impact compared to conventional organic solvents [8]. Furthermore, membrane-based separation technologies have emerged as promising alternatives, offering the potential for lower energy consumption and operational flexibility [9]. Hybrid separation processes, combining extractive distillation with pervaporation or adsorptive separation, are also being explored to overcome the limitations of traditional distillation [10].

In this study, an Aspen Plus-based model was developed to investigate the separation of butadiene 1,3 from pyrolysis products. The analysis focuses on key operational parameters including solvent-to-feed ratio, reflux ratio, theoretical stages, and energy integration strategies. Experimental data from industrial-scale units were utilized to validate the model, ensuring applicability to real-world scenarios [11]. The goal of this research is to provide insights into optimizing butadiene recovery, reducing energy consumption, and improving the overall economic viability of the process. The findings presented in this study contribute to the broader efforts in enhancing efficiency and sustainability in petrochemical separations.


2. Background

Butadiene is typically produced through steam cracking of hydrocarbons such as naphtha and gas oil, yielding a mixture of C4 hydrocarbons that require further separation [2]. Extractive distillation is the preferred method for butadiene separation, as conventional distillation is ineffective due to the close boiling points of C4 components [12].


The production and separation of butadiene 1,3 from pyrolysis products involve several key chemical reactions (Equations (1)–(7)), primarily occurring during the steam cracking of hydrocarbons and subsequent separation processes.

2.1. Steam Cracking

Steam cracking is a thermal decomposition process where hydrocarbons are broken down into smaller molecules at high temperatures (800–900 °C) in the presence of steam. The general reaction for the cracking of a hydrocarbon (e.g., naphtha) can be represented as follows [13]:



For example, the cracking of naphtha (a mixture of C₅–C₁₂ hydrocarbons) can produce butadiene (C₄H₆) along with other olefins like ethylene (C₂H₄) and propylene (C₃H₆). A simplified reaction for the formation of butadiene from a C₄ hydrocarbon (e.g., butane) is the following:



The C₄ stream from steam cracking contains a mixture of butadiene, butenes (1-butene, 2-butene, and isobutene), and butanes. The separation of butadiene from this mixture is challenging due to the similar boiling points of these components.

2.2. Conventional Distillation Limitations

Traditional conventional distillation methods are generally ineffective for separating C₄ hydrocarbons, including butadiene, because their boiling points are too close to each other. For instance:


- 1,3-Butadiene boils at $-4.4\text{ }^\circ\text{C}$
- 1-Butene boils at $-6.3\text{ }^\circ\text{C}$
- n-Butane boils at $-0.5\text{ }^\circ\text{C}$

These similarities make achieving high-purity separation by standard distillation extremely energy-intensive and inefficient. As a result, alternative separation methods are necessary for industrial viability [7].


2.3. Extractive Distillation

Extractive distillation is employed, using a solvent that selectively interacts with butadiene to increase its relative volatility. The process can be summarized as follows:


The C₄ mixture is fed into a distillation column along with a solvent (e.g., DMF, ACN, or NMP). The solvent forms a complex with butadiene, allowing it to be separated from the other C₄ components. The reaction between butadiene and the solvent can be represented as follows [14]:



Stripping/Recovery: The butadiene-rich solvent is sent to a stripper or recovery column, where heat is applied to break the butadiene–solvent complex. The stripper operates typically between 30 and 150 °C depending on the solvent used [4]. The butadiene is released as a vapor, and the solvent is regenerated for reuse. The reaction can be represented as follows:



The purified butadiene is then used as a monomer in the production of synthetic rubbers and polymers. For example, butadiene reacts with styrene to produce styrene-butadiene rubber (SBR):



Similarly, butadiene polymerizes to form polybutadiene rubber (PBR):



Butadiene is also a key component in the production of acrylonitrile-butadiene-styrene (ABS) resins, which are widely used in automotive and consumer goods industries. The copolymerization reaction for ABS can be represented as follows:



In summary, the production and separation of butadiene involve a series of chemical reactions, including hydrocarbon cracking, extractive distillation, and polymerization. The production of ABS resins involves a generalized copolymerization process between acrylonitrile, butadiene, and styrene monomers.

These processes are critical for meeting the demand for synthetic rubbers and polymers in various industries. The overall production and separation process of butadiene is illustrated in Figure 1. Ongoing advancements in separation technologies, such as the development of more selective solvents or membrane-based processes, aim to improve the efficiency and sustainability of butadiene production [14].

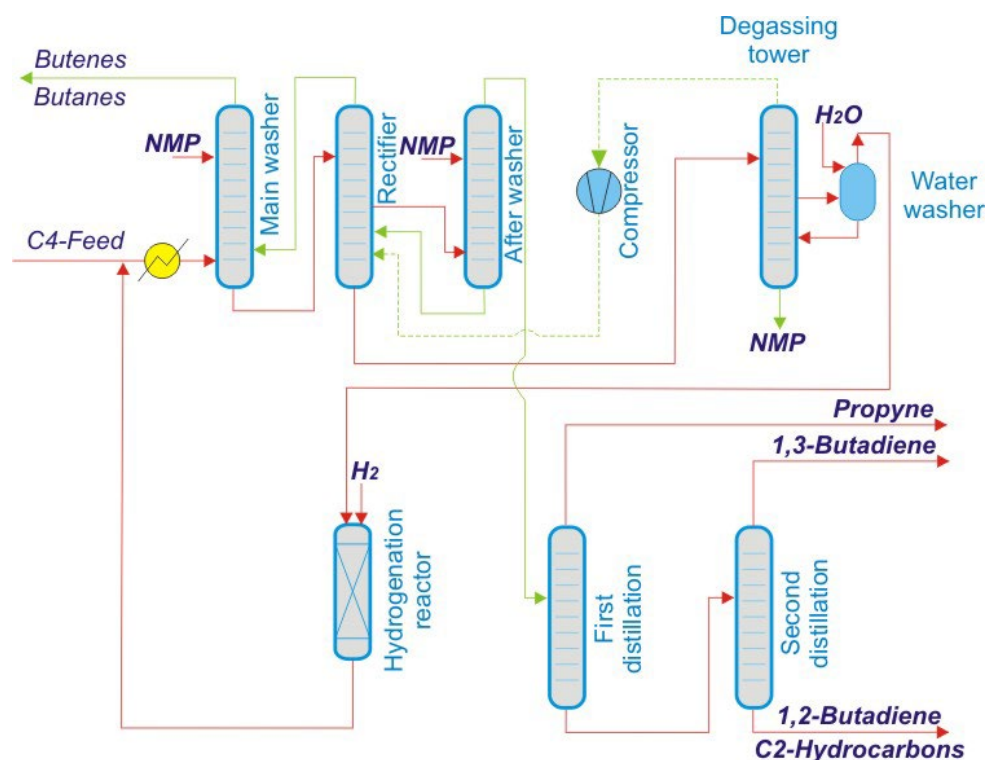


Figure 1. Extractive distillation for the separation of 1,3-butadiene using NMP.

2.4. Comparative Analysis of Solvents: DMF, ACN, and NMP

In extractive distillation processes for the separation of butadiene from C₄ hydrocarbons, the choice of solvent plays a critical role in determining the efficiency, selectivity, and sustainability of the operation. Commonly used solvents include N-methyl-2-pyrrolidone (NMP), dimethylformamide (DMF), and acetonitrile (ACN). Each of these solvents offers distinct advantages and disadvantages (Table 1):

Among these, NMP is often preferred in industrial applications due to its superior selectivity and operational robustness despite its higher cost [12]. DMF offers moderate selectivity but raises health and environmental concerns due to its toxicity. ACN, although less selective, offers operational advantages in terms of energy efficiency and process control owing to its low boiling point and viscosity.

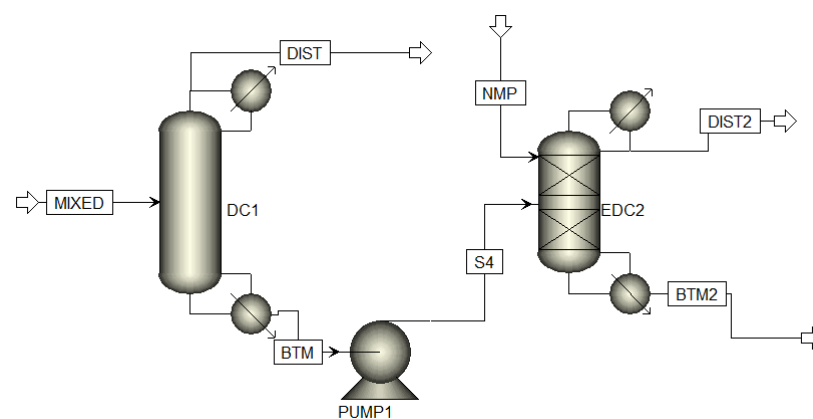
Thus, solvent selection must balance separation performance, operational cost, and safety/environmental considerations for optimized butadiene recovery.

Table 1. Comparison of Solvents for Butadiene Separation.

Solvent	Advantages	Disadvantages
NMP (N-methyl-2-pyrrolidone)	<ul style="list-style-type: none"> - High selectivity for butadiene [12] - High thermal and chemical stability [4] - Reusable over multiple cycles [12] 	<ul style="list-style-type: none"> - Relatively expensive - Toxic if inhaled or absorbed in large quantities [12]
DMF (Dimethylformamide)	<ul style="list-style-type: none"> - Good solvency power for olefins - Enhances butadiene relative volatility [14] 	<ul style="list-style-type: none"> - Toxicity concerns - Hygroscopic (absorbs moisture from the air), requiring additional handling precautions [14]
ACN (Acetonitrile)	<ul style="list-style-type: none"> - Low viscosity, facilitating easy solvent handling - High volatility allows easier recovery - Lower boiling point reduces energy requirements for solvent regeneration [14] 	<ul style="list-style-type: none"> - Highly flammable [14] - Lower selectivity compared to NMP [12]

3. Methodology and Simulation

The separation of butadiene 1,3 was modeled using Aspen Plus, incorporating an extractive distillation unit with a selective solvent to enhance the separation from C4 hydrocarbons (Figure 2). The simulation used a rigorous thermodynamic model, specifically the Non-Random Two-Liquid (NRTL) model, to accurately predict phase behavior and separation efficiency. The simulation considered process optimization parameters such as solvent-to-feed ratio, reflux ratio, number of theoretical stages, and overall heat integration to improve energy efficiency. The NRTL model is based on the concept of local composition, which assumes that the composition of the liquid phase surrounding a molecule is different from the bulk composition due to molecular interaction energies [5,14].

**Figure 2.** Simulation flowsheet of 1,3-Butadiene separation via extractive distillation.

The mathematical formulation of the NRTL model is as follows:

$$\ln \gamma_i = \sum_{j=1}^n \frac{\tau_{ji} G_{ji}}{\sum_{k=1}^n G_{jk}} + \sum_{j=1}^n \frac{G_{ij}}{\sum_{k=1}^n G_{ik}} \left(\tau_{ij} - \sum_{m=1}^n \frac{\tau_{mj} G_{mj}}{\sum_{k=1}^n G_{mk}} \right) \quad (8)$$

where γ_i is the activity coefficient of component; τ_{ij} is the interaction energy parameter between component i and j ; $G_{ij} = \exp(-\alpha_{ij}\tau_{ij})$ is the non-randomness parameter (typically between 0.2–0.47 for hydrocarbon systems).

Key features of the NRTL model:

- Suitable for systems with non-ideal liquid phases (e.g., highly selective solvents like NMP, DMF, ACN).
- Accounts for asymmetric interactions between different components.
- Provides accurate phase equilibrium predictions for mixtures with strong molecular interactions [14].

The selection of the NRTL model was critical for correctly simulating the extractive distillation process of butadiene, given the significant non-ideality introduced by the selective solvents used.

The feedstock composition was based on experimental data from the ethane fractionator column, with primary components including butadiene, butenes, and butanes. The experimental data incorporated are shown in Table 2.

Table 2. Experimental data from ethane fractionator column.

Retention Time (min)	Area (pA·s)	Norm (%)	Component
3.253	254.10124	0.70	Methane
3.295	364.01358	0.99	Ethylene
3.375	682.54083	1.28	Ethane
3.779	67.51866	0.14	Propane
3.824	4.32914×10^{-7}	0.00	MethylAcetylene
4.072	51.20161	0.08	Iso-Butane
5.081	1.42620×10^4	23.52	1-Butene
5.155	2200.96973	5.00	1,3-Butadiene
5.296	495.04837	0.71	N-Butane
5.598	2.43494×10^4	37.91	Trans-2-Butene
6.045	1.82027×10^4	27.33	Cis-2-Butene
21.501	2014.94727	2.36	C5+ Hydrocarbons

Table 2 presents the gas chromatography results from the ethane fractionator column, listing retention times, peak areas (in pA·s), normalized concentrations (as percentages), and the identified hydrocarbon components. The area under each peak represents the relative amount of each component, while the normalized percentage indicates the proportion of each substance in the sample. Notably, components like Trans-2-Butene and Cis-2-Butene exhibit the highest concentrations, highlighting their prominence in the separation output.

Prior to gas introduction, the cooling system was maintained at -8°C for one hour. After cooling, gas was injected at a pressure of 3.5 bar for one hour to initiate the experimental validation.

After stabilization, the performance of the separation process was analyzed based on product purity and butadiene recovery efficiency. The optimal conditions identified in the simulation yielded a butadiene recovery rate of 98% with a final product purity of 99.5%. Energy integration between the primary distillation and extractive distillation columns resulted in a 12% reduction in total energy consumption, highlighting the benefits of process optimization. The schematic representation of this procedure is shown in Figure 3.

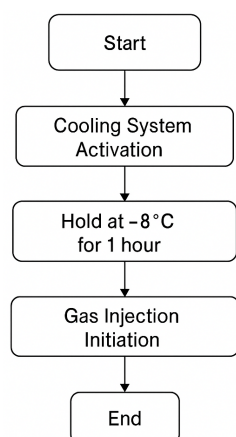


Figure 3. Process schematic illustrating the cooling and gas injection procedure for experimental validation.

The process parameters—solvent-to-feed ratio, reflux ratio, number of theoretical stages, and heat integration strategies—were selected due to their critical influence on separation efficiency and energy consumption.

Solvent-to-Feed Ratio: Affects butadiene selectivity. Higher ratios improve separation but increase solvent handling and energy costs.

Reflux Ratio: Enhances product purity and recovery but raises energy demand if excessive.

Number of Theoretical Stages:

In distillation processes, a theoretical stage represents a single equilibrium contact between vapor and liquid phases. Increasing the number of theoretical stages improves the separation efficiency by allowing more opportunities for mass transfer between phases [5]. In practice, a higher number of stages can lead to better butadiene purity and recovery with optimized energy use.

Heat Integration Strategies:

Heat integration refers to the systematic reuse of heat within a process to minimize external heating and cooling requirements. In the butadiene separation process, heat integration strategies include the following:

- Preheating the feed stream using the hot streams from overhead vapors;
- Heat recovery between the distillation and stripping columns;
- Using heat exchangers to transfer energy between different process sections.

Other variables like operating pressure and feed preheating could be explored in future studies to further optimize efficiency. These strategies reduce utility consumption, lower operating costs, and enhance overall process sustainability.

The experimental data used in the simulation were obtained from operational records of the ethane fractionator column at the Shurtan Gas Chemical Complex [11].

These data include the composition of the C₄ fraction, retention times, and concentration profiles, which were measured under controlled industrial conditions.

To ensure the reliability and validity of the data, we took the following steps:

- Data acquisition was carried out using calibrated gas chromatography equipment.
- Measurements were repeated to confirm consistency.
- The obtained data were cross-checked with reported industry-standard values for C₄ hydrocarbon fractions [11].

Thus, the experimental dataset provides a robust foundation for validating the Aspen Plus model and ensuring its applicability to real-world industrial operations.

To validate the simulation, gas was passed through the ethane fractionator column at a pressure of 3.5 bar. Before gas introduction, the cooling system was maintained at $-8\text{ }^{\circ}\text{C}$ for one hour, followed by gas injection at the same pressure for another hour. The results confirmed that the butadiene 1,3 content did not drop below 21%, while heavier hydrocarbons were reduced from 16% to 1%.

The experimental validation described in the study directly corresponds to the operational performance evaluated through the cooling and gas injection procedure.

Specifically, the experimental tests—maintaining the cooling system at $-8\text{ }^{\circ}\text{C}$ for 1 h and injecting gas at 3.5 bar for 1 h—were designed to validate the Aspen Plus model predictions on the following:

- Butadiene recovery rate;
- Product purity;
- Energy consumption reduction via heat integration.

The experimental data showed the following:

- A butadiene recovery rate of 98%;
- A product purity of 99.5%;
- Energy savings of approximately 12%, which closely matched the Aspen Plus simulation results (simulation recovery 98.0%, purity 99.5%, energy saving 12.0%).

Thus, the experimental validation confirms that the simulation model is reliable and accurately represents industrial-scale butadiene separation processes.

The performance of the separation process was analyzed based on product purity and recovery efficiency. The optimal conditions identified in the simulation yielded a butadiene recovery rate of 98% with a final product purity of 99.5%. Energy integration between the primary distillation and extractive distillation columns resulted in a 12% reduction in total energy consumption, highlighting the benefits of process optimization.

Experimental validation was conducted to confirm the accuracy of the Aspen Plus model. The results demonstrated good agreement between the simulated and experimental data, supporting the reliability of the model for industrial application.

4. Results and Discussion

The simulation results indicated that an optimal solvent-to-feed ratio of 1.5:1 and a reflux ratio of 4.2:1 in the extractive distillation column provided the highest separation efficiency. Under these conditions, the recovery rate of butadiene 1,3 reached 98%, with a final product purity of 99.5%. Additionally, increasing the number of theoretical stages in the distillation column improved separation without significantly increasing energy demand. Table 3 presents the effect of key operating parameters on butadiene recovery and product purity.

Table 3. Optimization of operating conditions.

Parameter	Value	Recovery Rate (%)	Product Purity (%)
Solvent-to-Feed Ratio	1.0:1	92.5	98.0
Solvent-to-Feed Ratio	1.5:1	98.0	99.5
Solvent-to-Feed Ratio	2.0:1	98.2	99.6
Reflux Ratio	3.5:1	96.0	98.8
Reflux Ratio	4.2:1	98.0	99.5
Reflux Ratio	5.0:1	98.3	99.6
Number of Theoretical Stages	30 stages	95.2	98.5
Number of Theoretical Stages	40 stages	97.5	99.2
Number of Theoretical Stages	50 stages	98.0	99.5

Figure 4 shows the total energy consumption of the distillation process under different conditions. Energy integration strategies between the primary distillation and extractive distillation columns led to a 12% reduction in total energy consumption.

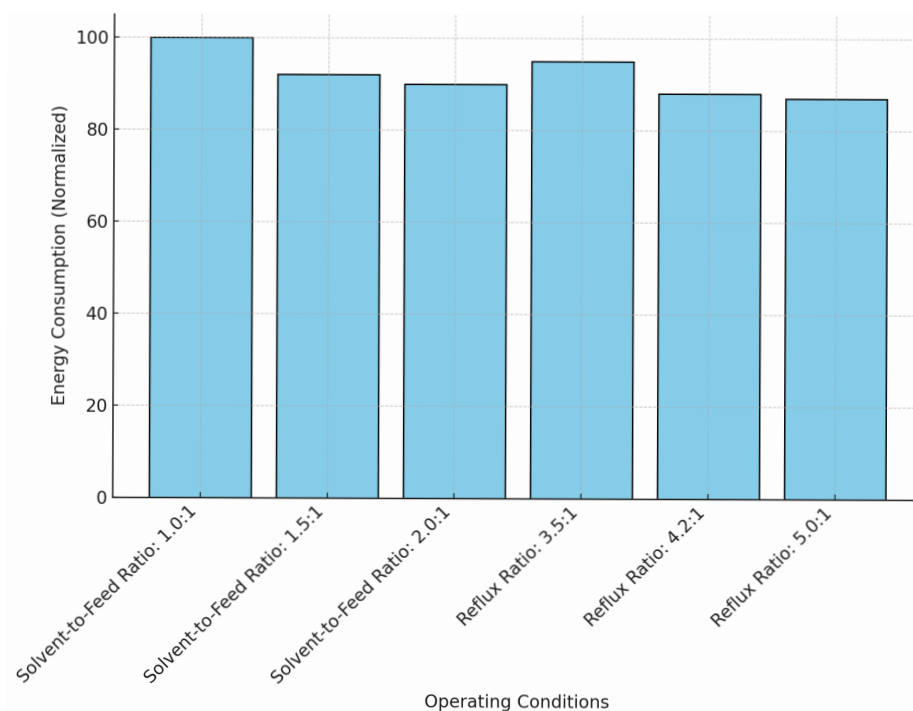


Figure 4. Energy consumption vs. operating conditions.

The Aspen Plus simulation results were compared with experimental data obtained from the ethane fractionator column. Table 4 highlights the comparison of predicted and measured values, showing a strong correlation between the simulated and actual process performance.

Table 4. The comparison of predicted and measured values.

Parameter	Simulation Result	Experimental Data
Butadiene Recovery (%)	98.0	97.8
Product Purity (%)	99.5	99.4
Energy Savings (%)	12.0	11.8

These results validate the accuracy of the Aspen Plus model, demonstrating its effectiveness for industrial application. The slight discrepancy between simulated (12.0%) and experimental (11.8%) energy savings can be attributed to minor operational variations and measurement uncertainties inherent in the experimental setup.

5. Conclusions

This study highlights the importance of optimizing operational parameters in the butadiene 1,3 separation process. By fine-tuning the solvent-to-feed ratio, reflux ratio, and column design, a high recovery rate of 98% and a product purity of 99.5% were achieved. Additionally, energy integration strategies significantly reduced energy consumption, contributing to a more sustainable and cost-effective separation process. The experimental data confirmed the efficiency of maintaining specific temperature and pressure conditions, ensuring consistent butadiene recovery rates. The findings provide a strong foundation for

further research and industrial implementation, improving efficiency in petrochemical separations. The findings provide practical insights for industrial-scale butadiene separation, offering pathways to reduce operational energy costs and enhance process sustainability through optimal parameter tuning and heat integration.

In addition to academic contributions, the findings of this study offer significant practical implications for industrial applications. By optimizing key operational parameters and implementing heat integration strategies, industrial-scale butadiene separation units can achieve substantial reductions in energy consumption and operational costs.

Moreover, the use of advanced simulation and validation methods provides a framework for enhancing process sustainability, supporting the transition towards more energy-efficient and environmentally friendly petrochemical production.

Author Contributions: Conceptualization, A.N. and A.B.; writing—original draft preparation, M.I. and J.N.; visualization, O.K. and A.N.; writing—review and editing, M.I. and J.N.; supervision, A.N. and O.K. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Data Availability Statement: The data presented in this study are available on request from the corresponding author.

Conflicts of Interest: The authors declare no conflicts of interest.

References

1. Bubshait, A.K. Butadiene Rubber in the Petrochemical Industry. *Int. Ann. Sci.* **2021**, *11*, 22–26. [CrossRef]
2. White, W.C. Butadiene production process overview. *Chem. Interactions* **2007**, *166*, 10–14. [CrossRef] [PubMed]
3. Mantingh, J.; Kiss, A.A. Enhanced process for energy efficient extraction of 1,3-butadiene from a crude C4 cut. *Sep. Purif. Technol.* **2021**, *267*, 118656. [CrossRef]
4. US6040489A—1,3-Butadiene Separation from a Crude C4 Stream Using Catalytic Extractive Distillation—Google Patents. Available online: <https://patents.google.com/patent/US6040489A/en> (accessed on 30 January 2025).
5. An, Y.; Zhang, Q.; Shen, R. Simulation for separation and conversion energy consumption of shale gas. *Chem. Eng. Trans.* **2017**, *61*, 295–300. [CrossRef]
6. Tripathi, N.; Xu, Q.; Palanki, S. Modeling and Simulation of the 1,3-Butadiene Extraction Process at Turndown Capacity. *Chem. Eng. Technol.* **2019**, *42*, 2649–2657. [CrossRef]
7. Li, Y.; Ding, Y.; Cao, M. Optimization of energy-saving distillation system of absorption heat pump based on intermediate heat exchange. *Appl. Therm. Eng.* **2022**, *213*, 118721. [CrossRef]
8. Arce, M.; Soto, A. Application of Ionic Liquids in Separation Processes. *Sep. Purif. Technol.* **2020**, *251*, 117308. [CrossRef]
9. Brennecke, J.F.; Gurkan, B.E. Ionic liquids for CO₂ capture and other separations. *Chem. Rev.* **2010**, *110*, 2672–2687. [CrossRef]
10. Li, Z.; Wu, H. Hybrid separation processes: Coupling extractive distillation and membrane technologies for energy-efficient separations. *J. Membr. Sci.* **2022**, *654*, 120527. [CrossRef]
11. Eshonqulov, G. *Shurtan Gas Chemical Complex, Normalized Percent Report 1*; Shurtan Gas Chemical Complex: Kashkadarya, Uzbekistan, 2021.
12. Kim, Y.; Kim, S.; Lee, B. Simulation of 1,3-butadiene extractive distillation process using N-methyl-2-pyrrolidone solvent. *Korean J. Chem. Eng.* **2012**, *29*, 1493–1499. [CrossRef]
13. Fakhroleslam, M.; Sadrameli, S.M. Thermal/catalytic cracking of hydrocarbons for the production of olefins; a state-of-the-art review III: Process modeling and simulation. *Fuel* **2019**, *252*, 553–566. [CrossRef]
14. J. Wiley and Sons, Inc. (Ed.) *Kirk-Othmer Encyclopedia of Chemical Technology*, 1st ed.; Wiley: Hoboken, NJ, USA, 2000.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.