

**ИЛМ-ФАН ВА ИННОВАЦИОН
РИВОЖЛАНИШ**

**НАУКА И ИННОВАЦИОННОЕ
РАЗВИТИЕ**

**SCIENCE AND INNOVATIVE
DEVELOPMENT**

2 / 2021

ТОШКЕНТ – 2021



**ЎЗБЕКИСТОН
РЕСПУБЛИКАСИ
ИННОВАЦИОН
РИВОЖЛАНИШ ВАЗИРЛИГИ
ИЛМИЙ ЖУРНАЛ**

2021 / 2

**ИЛМ-ФАН ВА ИННОВАЦИОН
РИВОЖЛАНИШ**

Журнал саҳифаларида чоп этилган материаллардан фойдаланилганда “Илм-фан ва инновацион ривожланиш” илмий журналдан олинди деб кўрсатилиши шарт. Таҳририят тақдим этилган мақолаларни тақриз қилиши ва қайтарishi мажбуриятини олмаган. Мақолада келтирилган далиллар ва маълумотлар учун муаллиф жавобгар.

Журналнинг электрон шаклида жойлаштирилган барча материаллар нашр қилинган ҳисобланади ва муаллифлик ҳуқуқи объекти саналади.

Директор:

М.Б. Турсунов

Бош муҳаррир:

Ҳ.Р. Салоева

Муҳаррирлар:

Ф.М. Муҳаммадиева

Е.А. Ярмолик

Г.И. Эргашева

Таҳририят манзили:

100174, Тошкент ш.,

Университет кўчаси, 7-уй.

Телефонлар: (99899) 373-90-35,

(99899) 920-90-35

Веб-сайт: www.indep.uz

E-mail: ilm.fan@inbox.ru

Обуна индекси – 1318

ISSN 2181-9637

Муассис:

“Инновацион ривожланиш
нашриёт-матбаа уйи” давлат
унитар корхонаси

ТАҲРИР КЕНГАШИ

Таҳрир кенгаши раиси:

Абдурахмонов Иброҳим Юлчиевич

б.ф.д., проф., академик

ТАҲРИР ҲАЙЪАТИ

Салимов Оқил Умурзоқович, т.ф.д., проф., академик

Юлдашев Бегзод Садикович, ф.-м.ф.д., проф., академик

Маджидов Иномжон Урушевич, т.ф.д., проф.

Турдикулова Шахлохон Ўтқуровна, б.ф.д., проф.

Пармон Валентин Николаевич, д.х.н., проф.,

Россия Фанлар академиясининг Сибирь филиали раиси

Мурзин Дмитрий Юрьевич, д.х.н., проф.,

Або Академияси университети (Финляндия)

Назаров Азимжон Соатмурод ўғли

Абдурахмонов Қаландар, и.ф.д., проф., академик

Арипов Тахир Фатихович, к.ф.д., проф., академик

Матчанов Рафик, т.ф.д., проф., академик

Саидов Акмал Холматович, ю.ф.д., проф., академик

Шарипов Хасан Туропович, к.ф.д., проф., академик

Собиров Равшан Зойирович, б.ф.д., проф., академик

Тожибаев Комилжон Шаробитдинович, б.ф.д., проф., академик

Азамат Зиё, т.ф.д., проф.

Далиев Хожиякбар, ф.-м.ф.д., проф.

Бўриев Забардаст Тожибоевич, б.ф.д., проф.

Муҳамедиев Мухторхон, к.ф.д., проф.

Мавлянова Шахноза Закировна, тиб.ф.д., проф.

Мажидова Ёқутхон Набиевна, тиб.ф.д., проф.

Беркинов Бозорбой Беркинович, и.ф.д., проф.

Рахимова Нигина Хайруллаевна, и.ф.д., проф.

Арабов Нурали Уралович, и.ф.д., проф.

Холмўминов Шайзоқ Рахматович, и.ф.д., проф.

Каримов Нарбой Ғаниевич, и.ф.д., проф.

Меҳмонов Султонали, и.ф.д., проф.

Хамедов Иса Ахлеманович, ю.ф.д., проф.

Мамасиддиқов Музаффаржон Мусаҷонович, ю.ф.д., проф.

Отажонов Аброр Анварович, ю.ф.д., проф.

Сагдуллаев Шомансур Шохсаидович, тех.ф.д., проф.

Тошболтаев Муҳаммад Тожиалиевич, тех.ф.д., проф.

Хамидов Муҳаммадхон, қ.-х.ф.д., проф.

Хакимова Муҳаббат Файзиевна, п.ф.д., проф.

Сайфуллаева Раъно, ф.ф.д., проф.

Карабаев Маматхан Садирович, г.-м.ф.д., проф.

Анарбоев Абдулхамиджон, т.ф.д.

Ашуров Хатам Бахранович, тех.ф.д.

Раҳмонов Зафарбек Яшинович, и.ф.ф.д. (PhD)



МУНДАРИЖА / СОДЕРЖАНИЕ / CONTENTS

ТЕХНИКА ФАНЛАРИ

- 58 **ЮНУСОВ М.П.,
ГУЛОМОВ Ш.Т.,
СУЛТАНОВ А.Р.,
ГАШЕНКО Г.А.,
ИСАЕВА Н.Ф.**
Некоторые аспекты синтеза современных
цеолитных адсорбентов – осушителей
типа А (4А)
- 71 **АРИФЖАНОВ А.М.
ХОШИМОВ С.Н.
АТАКУЛОВ Д.Е.**
Сув омборларида лойқа босиш
жараёнини замонавий технологиялар
ёрдамида баҳолаш
- 77 **МИРСАИТОВ М.М.
АБДУРАХМАНОВ Б.Б.
ВИКУЛОВ И.П.**
Моделирование износа токосъемной
вставки токоприемника с помощью
средств MATLAB – SIMULINK
- 85 **ЧОРШАНБИЕВ Р.Х.**
Ўзбекистон шароитида сабзи
ковлагич элеватори ишчи
органларининг параметрларини асослаш
- 92 **АЗИМОВ А.С.
ОХРЕМЕНКО И.М.**
Ўзбекистондаги оқава сувларни тозалаш
иншоотларини реконструкция қилиш
усулларини танлашга таъсир этувчи
омиллар

МЕТОДИК КАБИНЕТ

- 99 **САЛОЕВА ХИЛОЛА
РАВШАН КИЗИ**
Жанровая дифференциация и отбор
языковых средств при написании
научных статей



ЎЗБЕКИСТОН ШАРОИТИДА САБЗИ КОВЛАГИЧ ЭЛЕВАТОРИ ИШЧИ ОРГАНЛАРИНИНГ ПАРАМЕТРЛАРИНИ АСОСЛАШ

Чоршанбиев Равшан Хушмуродович,
Қарши муҳандислик-иқтисодиёт институти
“Қишлоқ хўжалигини механизациялаштириш
ва сервис” кафедраси катта ўқитувчиси;
e-mail: ravshanbek79@mail.ru

***Аннотация.** Изланишлар шуни кўрсатадики, тупроқнинг физик-механик хусусиятлари ўзгарувчанлиги сабабли сабзини ковлагичлар билан йиғиштириши вақтида қаттиқ кесаклар ҳосил бўлиб, илдизмевалардан ажралмай қолади ва элакраниш технологик жараёнини мураккаблаштиради. Бу эса машиналарнинг ортиқча юкланишига олиб келади. Ковлагич элеваторининг элаклаш қобилиятини яхшилаш мақсадида панжарали юмшаткич номли ишчи органни ишлаб чиқдик. Тадқиқотнинг мақсади – тупроқ уюмининг элеватор кенглиги бўйлаб тенг тақсимланишини таъминлайдиган ва илдизмеваларни энг кам зарарлаган ҳолда аралашмаларнинг тўлиқ элакранишини яхшилайдиган сабзи ковлагичнинг панжарали юмшаткичи параметрларини асослашдир. Сабзи ковлагич панжарали юмшаткичининг геометри ва кинематик параметрларини ўрганиб чиқдик. Сабзи пушталарининг физик-механик хусусиятларини ўрганиш натижасида механизмнинг конструктив параметрлари ва унинг кинематик кўрсаткичларини назарий жиҳатдан асосладик. Панжарали юмшаткич элеватордаги тупроқ қатлами билан ўзаро таъсирланганда, тупроқ кесакларининг майдаланиш жараёни юз беради. Тупроқнинг юмшатилиши эса қуйидаги параметрлар бўйича бўлиши аниқланди: юмшаткич радиуси – 9,5 см дан катта эмас, валнинг жойлашиш баландлиги – 20 см, юмшаткич паррагининг юкланган қисми – 6 см, панжарали юмшаткич кенглиги – 47 см. Панжарали юмшаткичларнинг сабзи илдизмеваларининг шикастланиш ва йўқотишларсиз тупроқ қатламидан интенсив равишда элакранишига ёрдам бериши тадқиқ этилди. Панжарали юмшаткичнинг айланиш тезлиги секундига 2,5 м дан ошмаслиги зарурлиги, элакранишни жадаллаштиришининг кинематик режими – 2,5, юмшаткич радиуси эса 9,5 см дан ошмаслиги кераклиги аниқланди.*

***Калит сўзлар:** сабзи ковлагич, тупроқ палахсасини элаклаш, панжарали юмшаткич, элеватор, сабзи, илдизмева, параметр.*

ОБОСНОВАНИЕ ПАРАМЕТРОВ РАБОЧИХ ОРГАНОВ ЭЛЕВАТОРА- КОПАТЕЛЯ МОРКОВИ В УСЛОВИЯХ УЗБЕКИСТАНА

Чоршанбиев Равшан Хушмуродович,
старший преподаватель кафедры
«Механизация и сервис сельского хозяйства»
Каршинского инженерно-экономического института

***Аннотация.** Исследования показывают, что из-за изменчивости физико-механических свойств почвы при уборке моркови копателями образуются твердые комки, которые остаются неотделимыми от клубней и усложняют технологический процесс просеивания, что приводит к перегрузке машин. Нами разработан решетчатый рыхля-*



ций рабочий орган, улучшающий сепарирующие способности элеватора-копателя. Целью исследования является обоснование параметров решетчатого рыхлителя-копателя моркови, который обеспечивает равномерное распределение ворса почвы по ширине элеватора и улучшает полную сепарацию примесей с минимальным повреждением корнеплодов. Были исследованы геометрические, кинематические параметры решетчатого рыхлителя-копателя моркови. Изучив физико-механические свойства грядки моркови, теоретически обосновали конструктивные параметры механизма и его кинематические показатели. Установили, что при взаимодействии решетчатого рыхлителя с почвенными пластами на элеваторе происходит разрушение почвенных комков и разрушение почвы при следующих параметрах: радиус рыхлителя – не более 9,5 см, высота вала – 20 см, нагруженная часть лопасти рыхлителя – 6 см, ширина решетчатого рыхлителя – 47 см. Установлено, что решетчатые рыхлители помогают корнеплодам моркови интенсивно отделяться от слоя почвы без повреждений и потерь. Выяснилось, что скорость вращения решетчатого рыхлителя не должна превышать 2,5 м/с, кинематический режим средства интенсификации сепарации – 2,5, а радиус рыхлителя не должен превышать 9,5 см.

Ключевые слова: копатель моркови, сепарация почвенных комков, решетчатый рыхлитель, элеватор, морковь, корнеплоды, параметр.

PROVIDING THE RATIONALE FOR PARAMETERS OF THE WORKING PARTS OF THE CARROT DIGGER ELEVATOR, IN THE CONTEXT OF UZBEKISTAN

Chorshanbiev Ravshan Khushmurodovich,
Senior Lecturer of the Department
of Mechanization and Service of Agriculture,
Karshi Engineering and Economic Institute

Abstract. Studies show that due to variability of physical and mechanical properties of the soil, hard lumps are formed when carrots are harvested by diggers and remain inseparable from the tubers complicating the sifting process, which leads to overloading of machines. A lattice loosening working part that improves the separating ability of the digger elevator has been developed. The research objective is to seek rationale for the parameters of the lattice ripper of the carrot digger, which ensures a uniform distribution of the soil pile along the width of the elevator and improves complete separation of impurities with minimal damage to root crops. (Materials and methods) The study looked into the geometrical, kinematic parameters of the lattice ripper of the carrot digger. After investigating the physical and mechanical properties of the carrot bed, the research could provide theoretical rationale for the design parameters of the mechanism and its kinematic indicators. (The research results and analysis) It has been found that when the lattice cultivator interacts with the soil layers on the elevator, soil clods get destroyed and the soil gets loosened at the following parameters: the radius of the cultivator - at least 9.5 centimeters, the height of the shaft - 20 centimeters, the loaded part of the foot of the cultivator - 6 centimeters, the width of the grid ripper - 47 centimeters. (Conclusion) It has been revealed that lattice rippers help separate carrot root crops quickly from the soil layer without any damage or loss. It appears that the rotation speed of the grid ripper should not exceed 2.5 meters/second, the kinematic mode of the intensification agent of separation - 2.5, and the radius of the ripper should be at least 9.5 centimeters.

Keywords: carrot digger, separation of the soil lumps, lattice cultivator, elevator, carrots, root crops, parameter.

Кириш

Ўзбекистон Республикасида сабзи, асосан, сабзавот далаларида, уй хўжаликлари ерларида, кичик фермер хўжаликларида етиштирилади. Хўжаликларда унинг етиштирилиши кўп қўл меҳнатини талаб қилади. Мавжуд технологиялар сабзи етиштириш ҳамда йиғиб олишда катта моддий ва меҳнат харажатларини талаб қилади, ишларни агротехник муддатларда бажариш имконини бермайди [1].


Сабзини йиғиб олишда, одатда, қўлда ясалган мосламалардан фойдаланилади. Улар эса иш сифатини яхши таъминлай олмайди. Хориж сабзи ковлагичлари эса энергия ва металл сарфини кўп талаб қилади. Бундан ташқари, пахтачилик комплексига мўлжалланган тракторлар билан агрегатлаб ишлатишда муаммолар пайдо бўлади, чунки махсус тракторлар йўқ. Мавжуд сабзи ковлагичларда элаканиш жараёни меъёрий намликка эга енгил ва ўртача тупроқларда қониқарли кечади. Оғир тупроқларда, аynикса, юқори ёки кам намликка эга шароитда ҳосилни йиғишда элаклаш қурилмалари самарасиз ишлайди.

Чивикли элеваторлар ўрнатилган ковлагичлар конструкцияси илдимеваларнинг

кўп йўқотилиши ва шикастланишига сабаб бўлади. Чивикли элеваторларнинг асосий камчилиги шундаки, тупроқ намлиги каммайиб боргани сари тупроқ уюмидаги кесакларнинг катталаниши кузатилади ва элаканиш қобилияти сезиларли даражада пасаяди, шунингдек, намлик ортиб боргани сари тупроқнинг чивикларга ёпишиб қолиши натижасида улар орасидаги элаканишни таъминлайдиган бўшлиқ амалда умуман йўқолади [2, 3].

Кўпгина элакловчи қурилмаларнинг элаклаш қобилияти элеваторлар сонини ошириш ҳисобига юз беради. Лекин улар ҳар доим ҳам кўп миқдордаги илдимеваларни шикастламасдан тўлиқ элаканишни таъминлай олмайди [4]. Шу нуқтаи назардан, сабзи илдимеваларини энг кам йўқотиш ва шикастлаш орқали ковлагич элеваторида тупроқ массасининг элаканиш самарадорлигини ошириш муҳимдир.

Тадқиқотнинг мақсади тупроқ уюмининг элеватор кенлиги бўйлаб тенг тақсимланишини таъминлайдиган ва илдимеваларни энг кам зарарлаган ҳолда аралашмаларнинг тўлиқ элаканишини яхшилайдиган сабзи ковлагичнинг панжарали юмшаткичи параметрларини асослашдир.

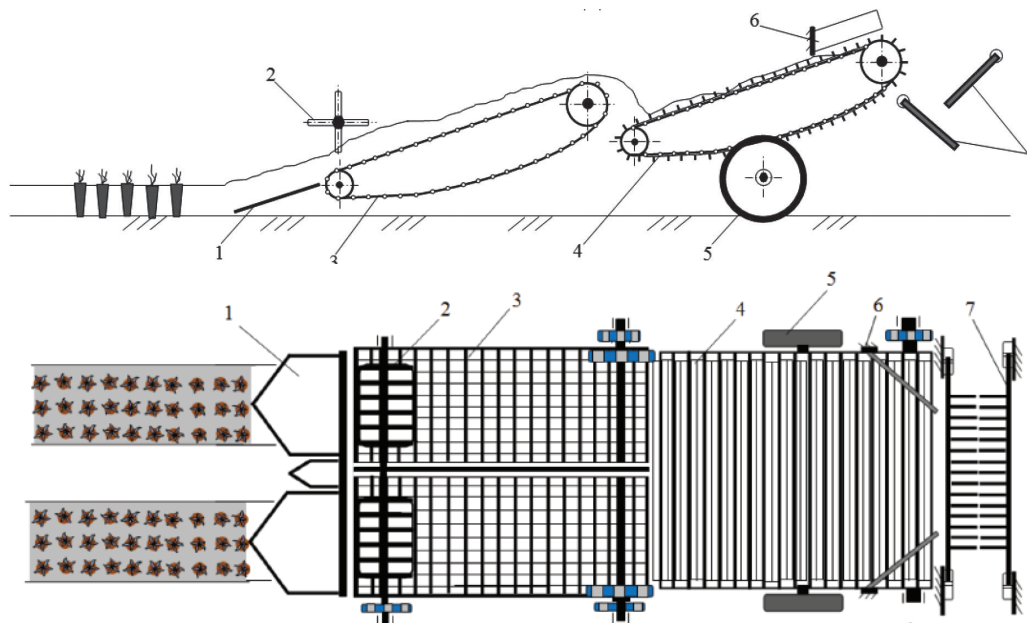

1-расм. Тақомиллашган сабзи ковлагичнинг конструкцион схемаси: 1 – қазувчи лемехлар; 2 – панжарали юмшаткич; 3 – асосий элеватор; 4 – каскадли элеватор; 5 – ғилдираклар; 6 – йўналтиргичлар; 7 – панжарали сундиргичлар



Агрегат тезлиги $V_{aep} = 1,0$ м/с бўлганида, панжарали юмшаткичнинг айланиш тезлиги $V_p = 2,5$ м/с бўлади.

Тадқиқотлар натижасида аниқланган $V_{aep} = 1,0$ м/с, $V_3 = 1,2$ м/с ва қабул қилинган $R_p = 0,095$ м, $V_p = 2,5$ м/с ва $h_n = 0,16$ м қийматларни (2) формулага қўйиб, $H_6 \geq 0,20$ м га тенг эканлигини аниқлаймиз [10-14].

Панжарали юмшаткич валининг баландлиги H_6 ва тупроқ палахсасининг қалинлиги h_n нинг қийматларига кўра, юмшаткич паррагининг тупроқ массасига ботиш чуқурлигини аниқлаймиз:

$$r_n = R_p - \left(\frac{R_p(V_{aep} + V_3)}{V_p} - \left(\frac{h_m + r_6}{2} \right) \right), \quad (4)$$

бу ерда r_n – юмшаткич паррагининг тупроқ массасига ботиш чуқурлиги, м.

Аниқланган $V_{aep} = 1,0$ м/с, $V_3 = 1,2$ м/с ва қабул қилинган $R_p = 0,095$ м, $h_m = 0,08$ м, $V_p = 2,5$ м/с ва $r_6 = 0,015$ м қийматларни (4) формулага қўйиб, $r_n = 0,06$ м эканлигини аниқлаймиз.

Тадқиқотлар мобайнида элеватордаги тупроқ массасининг геометрик шакл ва параметрлари аниқланди. Элеватордаги тупроқ массаси трапеция шаклида бўлиб, қиялик бурчаги $\varphi_6 = 60^\circ$, юқори қисмининг эни $B_0 = 0,4$ м.

Панжарали юмшаткич эни B_p , элеватордаги тупроқ массаси юқори қисмининг эни B_0 ва қиялик бурчаги φ_6 бўйича:

$$B_p \geq B_0 + 2 \left(R_p - \frac{R_p(V_{aep} + V_3)}{V_p} - \left(\frac{h_m + r_6}{2} \right) \right) ctg\varphi_6, \quad (5)$$

бу ерда B_p – панжарали юмшаткич эни, м;

B_0 – элеватордаги тупроқ массаси юқори қисмининг эни, м.

Юқорида келтирилган B_0 , R_p , V_{aep} , V_3 , V_m , h_m , ва r_6 нинг қийматларини (5) формулага қўйиб, у ҳолда $B_p \geq 0,47$ м бўлади.

Формула (5) бўйича панжарали юмшаткич энини $B_p = 0,48$ м деб қабул қиламиз.

Сабзи ковлагич маълум бир вақт оралиғида олдинга V тезлик билан $KK_0 = Vt$ масофага ҳаракатланади. Ўзгармас ω_p бурчак тезлик билан айланаётган панжарали барабан охирининг K_0 нуқтаси t вақт мобайнида $\varepsilon = \omega_p t$ бурчагига бурилиб, K ҳолатига ўтади.

Бунда $OK_0 = H_6 = R_p + h_m$ ни ҳисобга олиб, нуқтанинг ҳаракат тенгламаси координатлари:

$$\begin{cases} X_M = V_{aep} \cdot t - R_p \cos \omega_p t \\ Y_M = R_p + h_m - R_p \sin(\omega_p t) \end{cases} \quad (6)$$

бу ерда t – вақт, с.

Тенглама (6) ни вақт бўйича дифференциаллаб, абсолют тезликни ташкил этувчи тенгламаларни оламиз:

$$V_x = \frac{dx}{dt} = V_{aep} - R_p \omega_p \cos \omega_p t; \quad (7)$$

$$V_y = \frac{dy}{dt} = R_p \sin \omega_p t. \quad (8)$$

Паррақнинг ихтиёрий нуқтаси абсолют тезлигини қуйидаги ифода орқали аниқлаш мумкин:

$$V_{abc} = \sqrt{V_x^2 + V_y^2} = \sqrt{V_{aep}^2 - 2R_p \omega_p V_{aep} \sin \omega_p t + R_p^2 \omega_p^2}, \quad (9)$$

$$\text{бу ерда } \sin \omega_p t = \frac{R_p - r_n}{R_p} = \frac{\left(\frac{R_p(V_{aep} + V_3)}{V_p} + \frac{h_m - r_6}{2} \right)}{R_p}.$$

Бундан формула (9) қуйидаги кўринишга эга бўлади:

$$V_{abc} = \sqrt{V_{aep}^2 - \frac{V_{aep}}{R_p} (2R_p(V_{aep} + V_3) + V_p(h_m + r_6)) + R_p^2 \omega_p^2}. \quad (10)$$

Аниқланган $V_{aep} = 1,0$ м/с, $V_3 = 1,2$ м/с қийматларни формула (10)га қўямиз [10-14].

$R_p = 0,095$ м, $V_p = 2,5$ м/с ва $h_n = 0,16$ м қийматларни қабул қиламиз.

Натижада $V_{abc} = 2,3$ м/с қийматга эга бўламиз.

Хулоса

Панжарали юмшаткичлар сабзи илдизмеваларининг йўқотишлар ва шикастланишларсиз тупроқ палахсасининг интенсив равишда элакранишини таъминлайди. Сабзи ковлагичнинг тупроқ массасини самарали элаклаш имконини берувчи қуйидаги рационал параметрларини аниқладик: панжарали юмшаткич радиуси – 0,095 м, юмшаткич валининг жойлашиш баландлиги – 20 см, юмшаткич паррагининг тупроққа ботиш чуқурлиги – 6 см, панжарали юмшаткич эни – 47 см, панжарали юмшаткичнинг айланиш тезлиги – 2,5 м/с, интенсив элаклашни таъминловчи кинематик режим – 2,5, паррак ихтиёрий нуқтасининг ҳаракатланишини абсолют тезлиги – 2,3 м/с.



REFERENCES

1. Norchayev D., Norchayev R. Korneklubnekopatel. Yevroaziatskiy soyuz uchenix. [Root-digger. Eurasian Union of Scientists]. 2019, no 4 (61), pp. 55-57.
2. Zhongcai W., Hongwen L., Yijin M., Chuanzhu S., Xueqiang L., Wenzheng L., Guoliang S. Experiment and analysis of potatosoil separation based on impact recording technology. International Journal of Agriculture and Biology. 2019, no 5 (12), pp. 71-80.
3. Lu G. Y., Shang S.Q., Wang D.W., Li J.D., Han W.P., He X.N. Study on lacy components of carrot harvester. Journal of Agricultural Mechanization Research, 2016, no 2, pp. 119-122.
4. Pramod R.A., Moses S.C., Aalam R.N. Performance Evaluation of Adjustable Elevator for Tractor Drawn Potato Digger. International Journal of Current Microbiology and Applied Sciences. 2018, no 7 (11), pp. 1502-1513.
5. Petersen T., Hampf H. Einsatz einer pneumatischen Trennan-lage in der Annahmestrecke des Kartoffellagerhaus Broderstorf. Agrartechnik. 1984, no. 7 (34), pp. 314-316.
6. Listopad G.Y., Demidov G.K., Zonov B.D. i dr. Selsko-xozyaystvenniye i meliorativniye mashini (Agricultural and reclamation machines). Moscow, Agropromizdat, 1986, 688 p.
7. Alakin V.M., Nikitin G.S. Rezultati issledovaniy texnologicheskogo protsessa kartofelekopatelya. Selskoxozyaystvenniye mashini i texnologii. [Research results of the potato digger technological process. Agricultural machines and technologies]. 2018, no 5, pp. 14-19.
8. Nikitin G.S., Alakin V.M., Plaxov S.A. Opredeleniye ratsionalnoy skorosti vrasheniya rabochix organov intensivnoy zoni separatsii rotatsionnogo kartofelekopatelya. Agrarniy nauchniy jurnal. [Determination of the rational speed of rotation of the working bodies of the intensive separation zone of the rotary potato digger. Agrarian scientific journal]. 2019, no. 6, pp. 96-100.
9. Mukesh J., Vijaya R., Anil K. Design and Development of Tractor Operated Carrot Digger. Agricultural mechanization in Asia, Africa and Latin America. 2018, no. 3 (49), pp. 79-85.
10. Ahmed M.O., Abd El-Wahab M.K., Tawfik M.A., Wasfy K.I. Evaluating of a prototype machine for carrot crop harvesting suitable for small holdings. Zagazig Journal of Agricultural Research. 2018, no 1 (45), pp. 213-226.
11. Sibirev A.V., Aksenov A.G., Mosyakov M.A. Experimental Laboratory Research of Separation Intensity of Onion Set Heaps on Rod Elevator. Journal of Engineering and Applied Sciences, 2018, no 23, pp. 10086-10091.
12. Sibiryov A.V., Aksenov A.G., Mosyakov M.A. Rezultati eksperimentalnix issledovaniy separatsii voroxa luka-sevka na prutkovom elevatore s asimmetrichno ustanovlennimi vstryaxivatelyami. Engineering Technologies and Systems. [Results of experimental studies of separation of a heap of onion sets on a bar elevator with asymmetrically installed shakers. Engineering Technologies and Systems]. 2019, no 1, pp. 91-108.
13. Dorokhov A.S., Sibirev A.V., Aksenov A.G. Results of laboratory investigations of soil screening ability of a chain digger with asymmetric vibrator arrangement. INMATEH-Agricultural Engineering, 2019, no 1 (57), pp. 9-18.
14. Dorokhov A.S., Aksenov A.G., Sibirev A.V. Methodological justification of dynamic systems model construction by artificial neural networks. INMATEH – Agricultural Engineering. 2019, no 2 (58), pp. 63-75.
15. Sibirev A.V., Aksenov A.G., Dorokhov A.S., Ponomarev A.G. Comparative study of force action of harvester work tools on potato tubers. CAAS agricultural engineering journal, 2019, no 3 (55), pp. 85-90.
16. Dorokhov A.S., Sibiryov A.V., Aksenov A.G. Rezultati polevix issledovaniy separatsii voroxa luka-sevka na prutkovom elevatore s asimmetrichno ustanovlennimi vstryaxivatelyami. Engineering Technologies and Systems. [Results of field studies of separation of a heap of onion



sets on a bar elevator with asymmetrically installed shakers. Engineering Technologies and Systems]. 2020, no. 1 (30), pp. 133-149.

17. Dorokhov A.S., Sibirev A.V., Aksenov A.G., Sazonov N.V. Justification of design and technological parameters of the onion harvester bedshaping roller spiral drum. INMATEH-Agricultural Engineering. 2020, no 1, pp. 107-114.

18. Dorokhov, A.S. Laboratory-field research results for onion cleaning. A.S. Dorokhov, A.V. Sibirev, A.G. Aksenov, M.A. Mosyakov. INMATEH: Agricultural Engineering. 2020, no. 2 (57), pp. 41-48.

19. Asghar M.T., Ghafoor A., Munir A., Iqbal M., Ahmad M. Design modification and field testing of groundnut digger. Asian Journal of Science and Technology. 2014, vol. 5, pp. 389-394.

20. Natenadze N. The design and theoretical justification of a vibratory digger shovel. Scientific technical union of mechanical engineering Bulgarian association of mechanization in agriculture. 2016, vol. 5, pp. 9-12.

21. Norchayev R, Norchayev D, Chorshanbiyev R. Obosnovaniye parametrov reshetchatogo rixlitelya kopatelya morkovi v usloviyax Respubliki Uzbekistan. Selskoxozyaystvenniye mashini i texnologii. [Justification of the parameters of the lattice ripper of the carrot digger in the conditions of the Republic of Uzbekistan. Agricultural machines and technologies]. vol. 14, no. 3, 2020, pp. 15-19.