
“2030 STRATEGIK ISTIQBOLLARI: QISHLOQ XO‘JALIGI, SUV VA ENERGETIKA RESURSLARI, TRANSPORT, OZIQ-OVQAT XAVFSIZLIGI, NEFT-GAZ, EKOLOGIYA HAMDA INNOVATSION TA’LIM SOHALARINING GLOBAL UYG‘UNLIKDA RIVOJLANISHI”

XALQARO ILMIY-TEXNIKAVIY ANJUMANI MATERIALLARI TO‘PLAMI

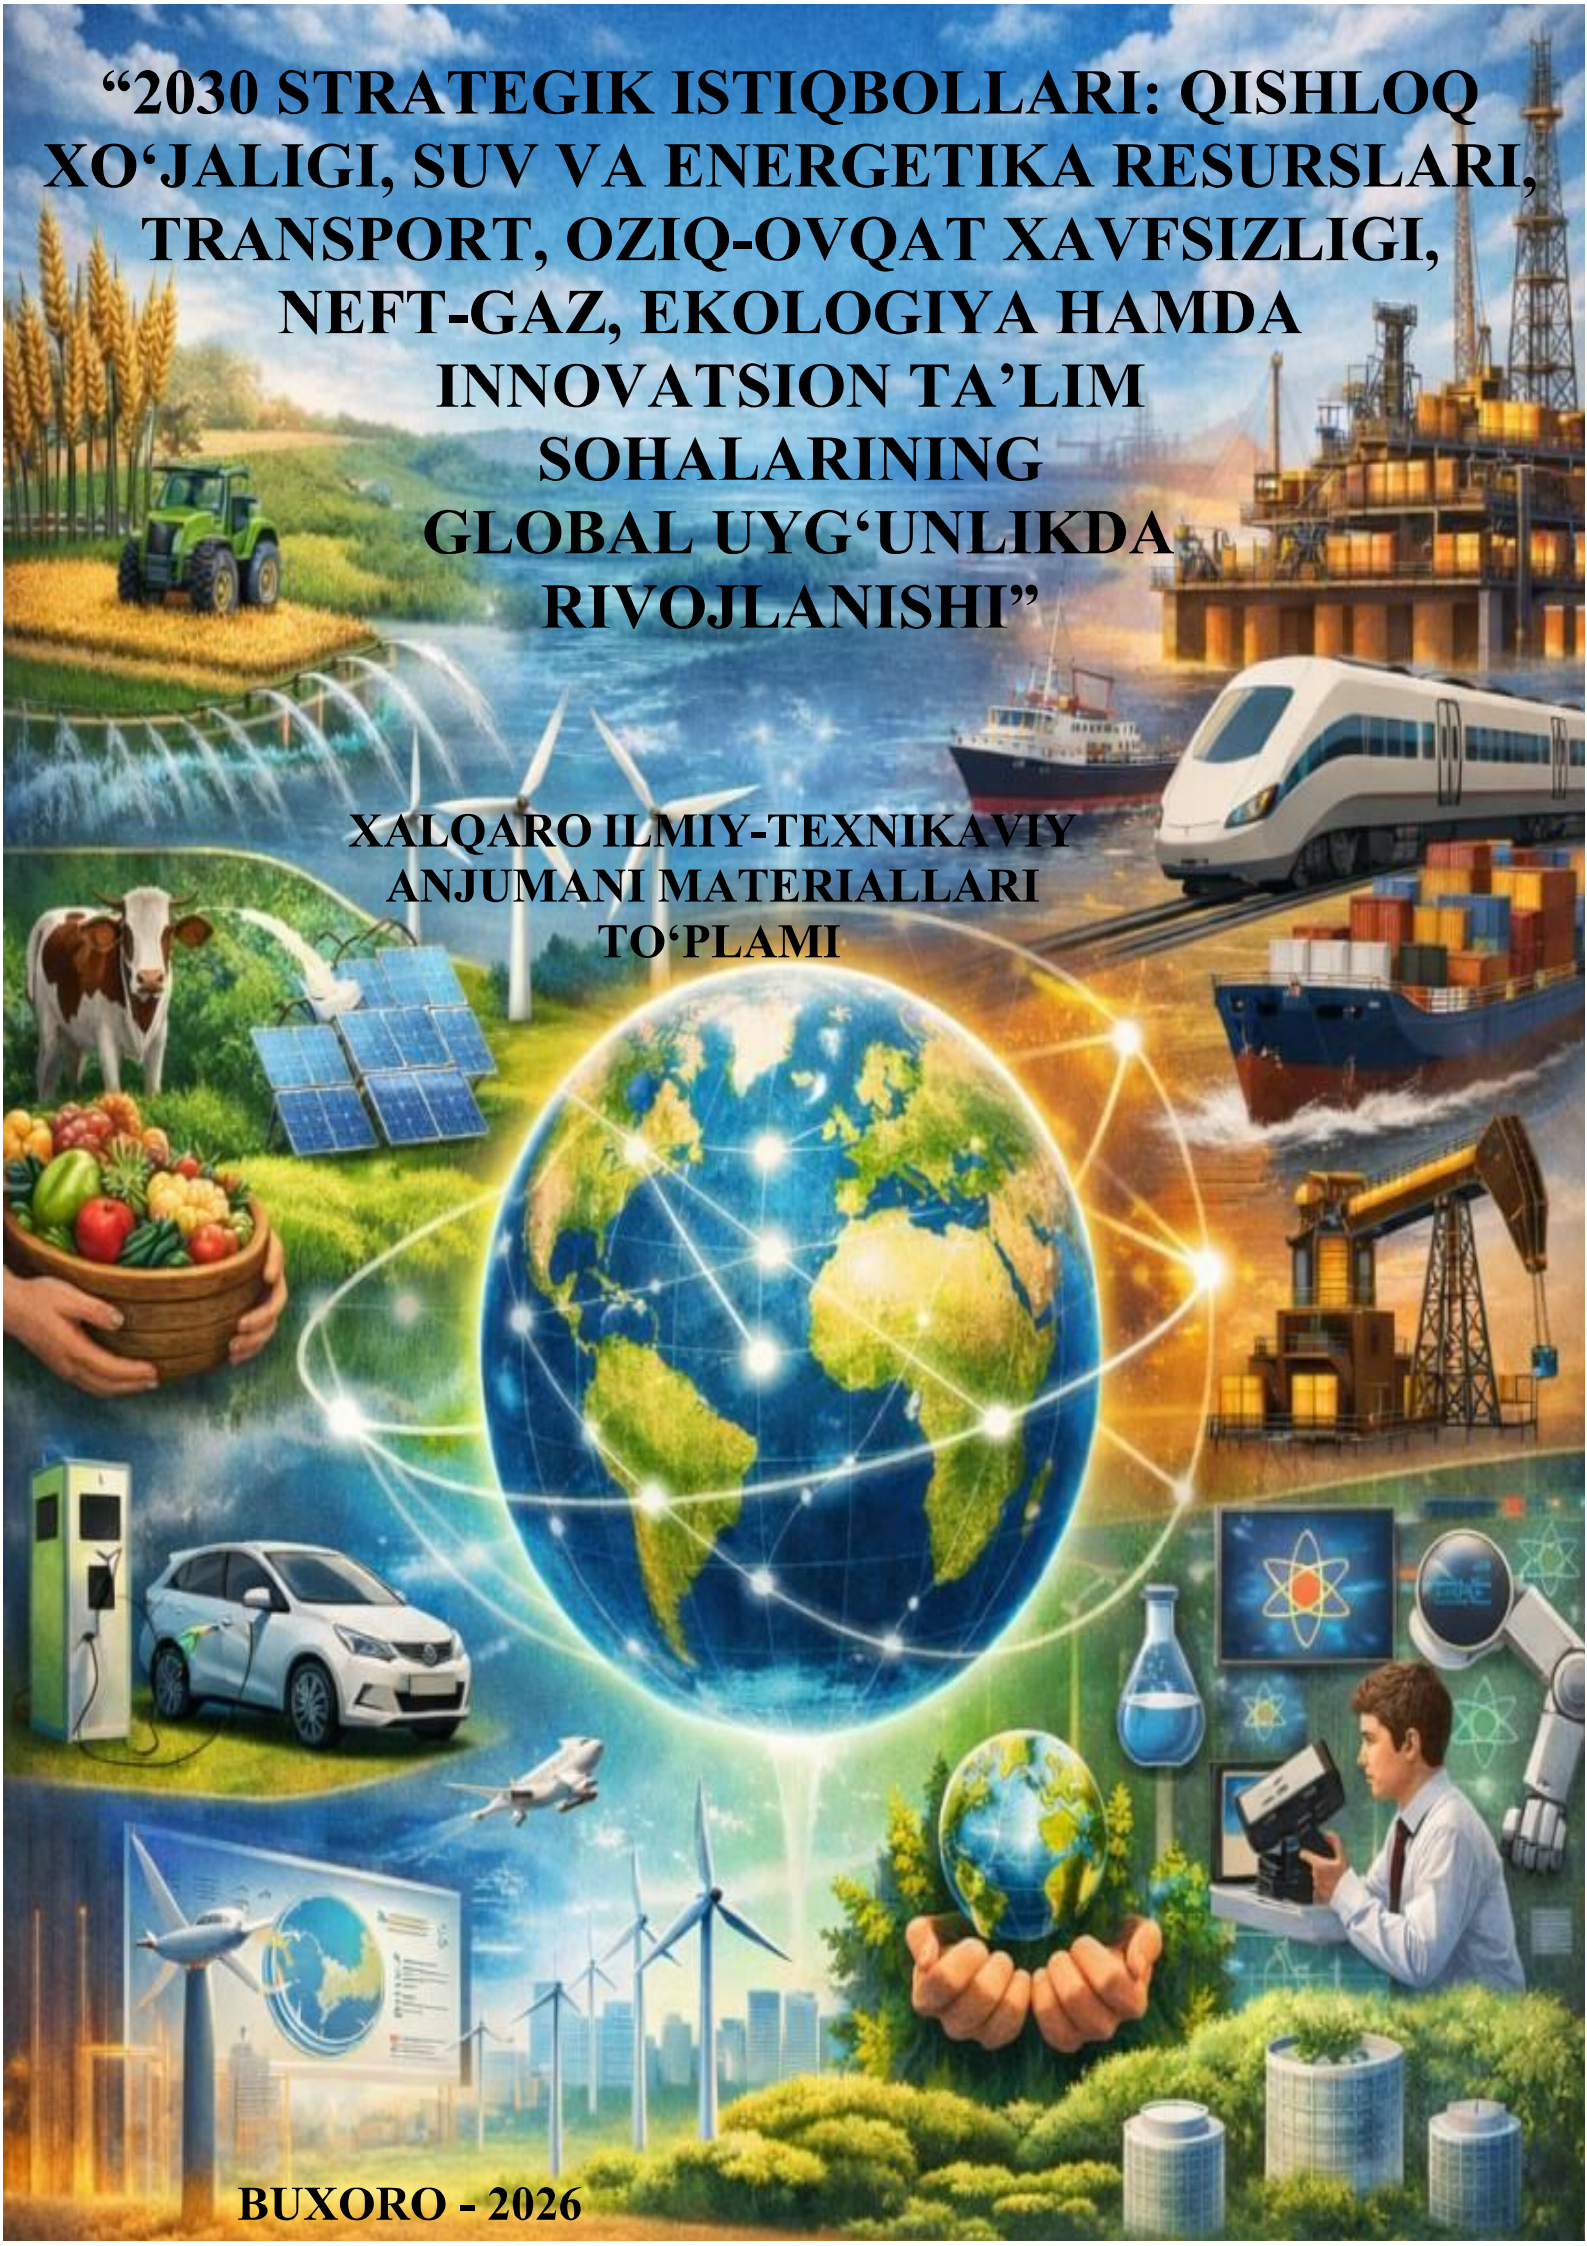

BUXORO - 2026

O‘ZBEKISTON RESPUBLIKASI BUXORO DAVLAT TEXNIKA UNIVERSITETI

ROSSIYA FEDERATSIYASI KURSK DAVLAT AGRAR UNIVERSITETI

ROSSIYA FEDERATSIYASI BELGOROD DAVLAT AGRAR UNIVERSITETI

M. AUEZOV NOMIDAGI JANUBIY QOZOG‘ISTON TADQIQOD UNIVERSITETI

QIRG‘IZ RESPUBLIKASI O‘SH DAVLAT UNIVERSITETI

TURKIYA RESPUBLIKASI USHAK UNIVERSITETI

O‘ZBEKISTON RESPUBLIKASI
OLIY TA’LIM, FAN VA INNOVATSIYALAR VAZIRLIGI

BUXORO DAVLAT TEXNIKA UNIVERSITETI

2030 STRATEGIK ISTIQBOLLARI: QISHLOQ XO‘JALIGI, SUV VA ENERGETIKA RESURSLARI, TRANSPORT, OZIQ-OVQAT XAVFSIZLIGI, NEFT-GAZ, EKOLOGIYA HAMDA INNOVATSION TA’LIM SOHALARINING GLOBAL UYG‘UNLIKDA RIVOJLANISHI

XALQARO ILMIY-TEXNIKAVIY ANJUMANI MATERIALLARI TO‘PLAMI

1-2-aprel 2026 yil



BUXORO – 2026

IMPROVED TEMPORARY DITCH DIGGER MACHINE

J.Ruzikulov, H.Samadov, D.Ruzikulova, A.Sayfullayev

Bukhara State Technical University

B.Ganiyev

Karshi State Technical University

jasurruzikulov@mail.ru

Abstract: The article describes the process of digging a temporary ditch, the dimensions of the temporary ditch, their location and cross-section schemes. In order to reduce the traction resistance of the temporary ditch digger and improve the quality of the temporary ditch in the creation of these ditches, the results of the preliminary research on the installation of three disk blades in front of the temporary ditch digger and a roller in order to compact the bottom of the ditch to the required level are presented.

Key words: irrigated farming, egat, irrigation rate, КЗУ-0.3 ditch diggers, disc knives, compacting coil, filtration.

Аннотация. В статье описан процесс выкапывания временного канала, его размеры, расположение и схемы поперечного сечения. Для уменьшения сопротивления движению землеройной машины и улучшения качества временного канала при их создании представлены результаты предварительных исследований по установке трёх дисковых ножей перед землеройной машиной и валика для уплотнения дна канала до требуемого уровня.

Ключевые слова. Орошаемое земледелие, егат, норма орошения, землеройные машины КЗУ-0.3, дисковые ножи, уплотняющий вал, фильтрация

In irrigated agriculture, water is distributed over the soil in a simple way, and it is divided into types of irrigation such as edging, strip irrigation and pressure irrigation. In this method, temporary networks are used to irrigate the land. Temporary networks are removed at the beginning of the irrigation season, and

after the end of the irrigation season, they are leveled so that they do not affect the autumn-winter work. In the climatic conditions of Uzbekistan, temporary ditches, ditches, paths and irrigation ditches are among the temporary structures in irrigated agriculture. During the irrigation process, water is supplied from the plot distributor to the temporary ditch, from it to the ditch, and from the ditch to the beshamak and egates. After planting agricultural crops in fields leveled with laser levelers and well prepared for planting, temporary irrigation networks are started [1].

Irrigation egates are taken at the same time as cultivation between rows of crops. The depth of the furrows is determined depending on the width of the row spacing: when the row spacing is 60 cm, it is 12 to 18 cm, when it is 90 cm, it is 15 to 32 cm [1,2]. There are several types of temporary ditch diggers used in irrigated agriculture in Central Asia. In most cases, the digging of these ditches by КЗУ-0.3 ditch diggers is distinguished by the convenience of meeting the requirements of irrigated agriculture.

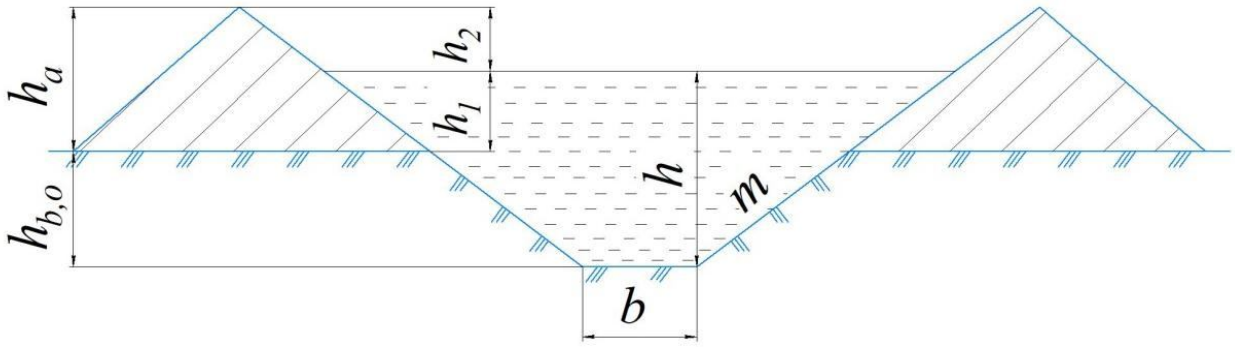


Figure 1. The main dimensions of the temporary ditch

h_1- the distance from the ground level to the water surface, h_2- the distance from the surface of the water to the top of the mound, h- the distance from the bottom of the ditch to the surface of the water, b - the width of the bottom of the channel, m-slope, h_a- soil mound height, $h_{b,o}$- the distance from the ground level to the bottom of the ditch

The depth of the ditch obtained with the КЗУ-0.3 ditcher-leveler is 30-35 cm, the width of the bottom is 20 cm, the width of the top is 120-130 cm, the height of the soil pile is 25-20 cm, and the capacity of the ditch is 40-60 1/ is sec (Fig. 1).

The hydraulic calculation of temporary networks required the determination of the depth of its filling with water, the average speed of water flow and the network's washout [3,4,5].

In our initial practical and theoretical analysis, in the design of temporary ditches, the mechanization of demolition, leveling of these networks and the creation of temporary ditches in field areas is a condition of not occupying the earth's surface, it is convenient for water filtration and agricultural machines, devices that work the soil, the possibility of adjusting the water consumption of temporary ditches, irrigation water consumption in plowing, the productivity of waterers, the quality of irrigation and the planned yield are taken into account [6,7].

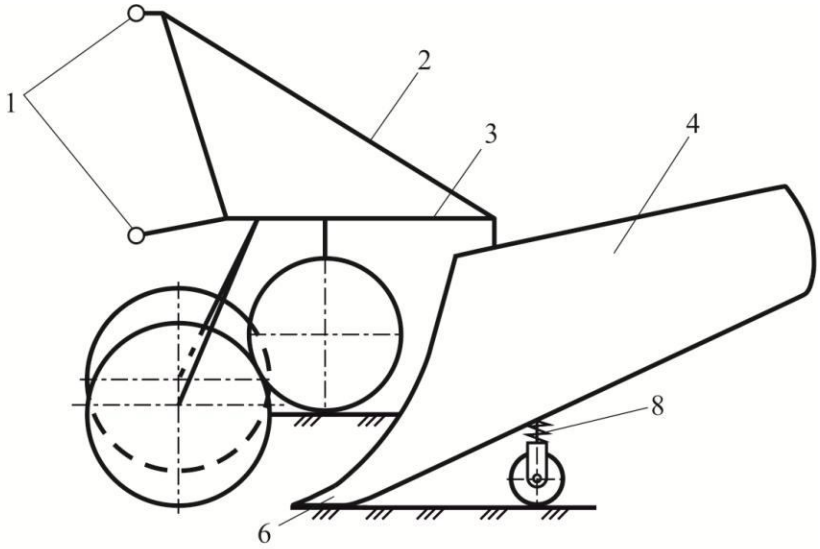


Figure 2. Construction scheme of the improved ditch digger.

During our experiments, we witnessed that high-quality ditches were not dug due to the high energy requirement of this type of ditcher during operation and the excessive force exerted by the soil on the ditcher. Taking into account the above shortcomings, in order to increase the work efficiency of the temporary ditch digger, in order to soften the soil, reduce the resistance, improve the quality of the soil fraction and slope, and to compact the bottom of the created temporary ditch, a roller was installed in the front part of the dumper (Fig. 2). The temporary ditch digger consists of a frame 2 equipped with a suspension device 1, a main working equipment frame 3, a tipper 4 and a plow 6, as well as a roller and pressure spring

8, which compacts the bottom of the ditch being formed. The working technological process of the improved ditch digger is as follows: the ditch digger is suspended on the back of the tractor and brought into working condition.

Due to the forward movement of the tractor, the working equipment is lowered into the soil at a certain depth. In the process of digging a temporary ditch, the cutting straight discs placed at a certain distance relative to each other sink into the soil and, as a result of their contact with the soil, rotate around their axis and cut the soil in front of the dumper at a specified depth. A channel is created by pushing it to the side with the help of a pusher. As a result, the unit's tensile strength decreases during operation. In the process of ditch digging, due to the cutting of the soil layer with the help of disks, the slope of the side of the ditch and the uniformity of its geometric shape are ensured, and as a result of the compaction of the installed box, a quality ditch is formed.

Therefore, the improved energy-saving channel digger with the recommended discs allows to reduce the fuel consumption and increase the productivity several times compared to the existing device when digging a temporary ditch.

REFERENCES

1. Z.A.Artukmetov, H.Sh.Sheraliyev. Bases of crop irrigation. T. 2007.

2. Imomov Sh., Jurayev A.., Ruziqulov J., Kurbonboyev S., Ruziqulova D., Xusinov S., Madadkhonov T. (2022). Theoretical studies on the design of trencher work equipment. Eurasian Journal of Academic Research, 2(12), 989–996.

3. Sh.J.Imomov, J.U.Ruzikulov, S.S.Kurbanbayev, H.S.Safarov, K.S.Sobirov, and Z.Sh.Isakov "Technological process of provisional dig a ditch", Proc. SPIE 12296, International Conference on Remote Sensing of the Earth: Geoinformatics, Cartography, Ecology, and Agriculture (RSE 2022), 122960O (6 July 2022);

4. Energy-saving device for temporary ditch digging I S Hasanov1, J U Ruzikulov1, F A Ergashov1, M J Toshmurodova1 and M R Sotlikova. IOP Conference Series: Earth and Environmental Science, Volume 868, International Conference on Agricultural Engineering and Green Infrastructure Solutions (AEGIS 2021) 12th-14th May 2021,

5. Ruziqulov J., Kurbonboyev S., Xusinov S., & Ruziqulova D. (2023). Improvement of the scraper work equipment and improving its efficiency. Eurasian Journal of Academic Research,3 (1 Part 4), 12–16.

6. J.U.Ruzikulov, D.U.Ruzikulova, U.F.Khusenov. Energy-saving device for temporary ditch production france international scientific-online conference: "Scientific approach to the modern education system" Part 18, 5th October

MUNDARIJA

T/r	Mualif(lar) hamda maqola(tezis)ning nomi	Bet
	I SHO‘BA. QISHLOQ XO‘JALIGI VA AGROINNOVATSIYALAR	
1.	**С.В. Андреев, Е.Г. Котлярова.** Влияние органо-минеральных удобрений и регулятора роста на биологическую активность почвы в посеве ярового ячменя	5
2.	**Е.И. Тупикова, Е.Г. Котлярова.** Агрономическая эффективность применения минеральных удобрений и микроудобрений на яровом ячмене в зависимости от способа основной обработки почвы в условиях юго-запада ЦЧР	8
3.	**И.В. Мирошниченко.** Региональные особенности энергетического потенциала отходов животноводства	12
4.	**Imomov Sh.J., Xasanov I.S., Ro‘ziqulov J.O‘., M.M.Sarimsaqov.** Gidromorf tuproqlar paxtachiligida azotli o‘g‘itlarni qo‘llash	18
5.	**F. X. Mavlanov.** O‘zbekiston sharoitida ananaviy usulda yetishtirilgan sholi ko‘chatlarini qadash uchun mexanizm	29
6.	**С.А.Хазиев, И.Г.Горлова, С.И.Мамаджанов** Инновационные технологии очистки и сортировки семян пустынных пастбищных кормовых растений	33
7.	**I.S.Xasanov.** Sug’orma dehqonchiligida lazerli tekislagich agregatlaridan foydalanish samaradorligini o‘rganish	44
8.	**A.N.Xudoyarov, I.I.Abdimominov, M.A.Yuldasheva, M.I.Mo‘minov, I.I.Iminov, M.T.Ismatullaeva.** Manzarali daraxt ko‘chatlarini ekadigan mashina uya ochkich yumshatkichining uzunligini asoslash bo‘yicha o‘tkazilgan eksperimental tadqiqotlar	48
9.	**Sh.Sh.Akramov, L.B.Abdullayev.** Soyaning o‘sishi va rivojlanishiga mineral o‘g‘itlarning ta’siri	56
10.	**A.To‘xtaqo‘ziev, I.A.Nazirjonov, M.A.Yuldasheva, M.T.Ismatullaeva.** Pushta olgich qanotlarining ochilish burchagini uning agrotexnik va energetik ish ko‘rsatkichlariga ta’siri	60
11.	**Б.А.Иргашев, И.Ш.Каримова.** Прогнозирование ресурса и потребности в запасных частях сельскохозяйственной техники по результатам трибомониторинга работавших масел	67
12.	**A.P.Parpiyev, K.E.Shernazarov, F.S.Sadikov, I.B.Mardonov.** UXK tozlash uskunasidagi arrachali baraban kolosniklar joylashuv burchagini paxtani ifloslikka tushishiga ta’siri	73
13.	**A.P.Parpiyev, K.E.Shernazarov, X.A.Gatayev, O.Q.Hamidov.** Arrachali baraban bilan to‘rli yuza orasidagi masofasini tadqiq etish	77

48.	**И.И.Нишонова.** Методы учета экспортных операций на предприятиях, экспортирующих сельскохозяйственную продукцию	**291**
49.	**F.U.Karshiev, Y.J. Shamayev, J.N.Yodgorov.** Chorvachilikda kichik o‘lchamli dag‘al va donli ozuqalarni maydalagich-ezgichlar ishlab chiqish	**298**
50.	**Q.I.Ro‘ziqulov, A.S.Cho‘lliyev.** Qorako‘l tumani cho‘l hududida ko‘chma nasos stansiyalaridan foydalanish samaradorligini oshirish	**304**
51.	**Sh.S.Ostonov, J.T.Jo‘rayev** «STRIP-TILL» texnologiyasida makkajo‘xori ekadigan seyalkaning tuproqqa ishlov beradigan qurilmasini ishlab chiqish	**310**
52.	**Z.Sh.Isakov.** Tishli yumshatkich ishchi organining tortishga qarshiligi va unga ta’sir etuvchi omillar	**317**
53.	**T.F.Murodov.** Mahalliy o‘g‘itlagich yoygichining o‘rnatilish burchagi va uning o‘g‘itlarni qator oralig‘ida tekis taqsimlanishiga ta’siri	**322**
54.	**H.H.Olimov, M.A.Sodikov.** Sarimsoqpiyoz ekish jarayonini mahalliy sharoitga mos mexanizatsiyalash va avtomatlashtirish imkoniyatlari	**329**
55.	**Y.F.Sultanov**. Qoraqalpog‘ist on respublikasi sharoitida hisor, jaydara zotlari va duragaylari qo‘zilar konstitutsiyasi	**338**
56.	**A.To‘xtaqo‘ziyev, A.Q.Nietullayev.** Tirma-g‘altakmola g‘altakmolasining parametrlarini aniqlash	**341**
57.	**Sh.J.Imomov, A.B.Babamuradov, Sh.S.Ostonov.** G‘altakmolali yumshatkichning bo‘ylama-tik tekislikdagi tebranishlarini tadqiq etish	**346**
58.	**M.N.Fayzulloyev.** Constructive classification of a rotating plug in a horizontal plane with a geometric combined working surface	**355**
59.	**J.O‘.Ro‘ziqulov, D.Sh.Suyunova, L.X.Bekmuratov, A.Sayfullayev.** Buldozerlar uchun takomillashtirilgan ishchi jihoz	**359**
60.	**J.Ruzikulov, H.Samadov, D.Ruzikulova, A.Sayfullayev, B.Ganiyev.** Improved temporary ditch digger machine	**367**
61.	**Sh.X.G‘apparov, A.A.Eshmo‘minov.** Mahalliy tuproq-iqlim sharoitida biota orientalisni ko‘paytirish usullarining qiyosiy tahlili (Surxandaryo misolida)	**371**
62.	**Sh.X.G‘apparov, Q.B.Muxammadiyev, V.Q.Nunnazarov.** O‘rmon xo‘jalik bo‘sh hududlarida dorivor oq-zira yetishtirishning iqtisodiy samaradorligi va ekologik ahamiyati	**377**
63.	**J.O‘.Ro‘ziqulov, A.Turg‘unov, A.Sayfullayev, D.Ro‘ziqulova.** Skreper ishchi jihozlarini takomillashtirish orqali energiya tejamkorligini va ish unumdorligini oshirish	**382**
64.	**A.B.Babojanov, Sh.B.Djumaboyeva.** Sabzavotchilikning rivojlanishi va kombinatsiyalashgan mashinadan foydalanish	**390**

